

MOBILE SCALPERS CREATING NEW BUSINESS OPPORTUNITIES



Our phenomenally successful scalper range has been designed to handle a wide range of applications and compliment our mobile crushers range. They are the most versatile and reliable compact mobile solutions on the market today.

To achieve our goal of minimum user intervention, we have focused on giving you highly efficient solutions with user-friendly features for ease of operation and ease of maintenance. These include our easy to use control system with sequential start and radio remote control.

Our scalpings are capable of handling a wide range of different and difficult materials and applications, such as construction waste, landfill mining, quarry overburden, mine dumps and scalping before a crusher or screening aggregates after a crusher.

KEY BENEFITS

- Massive production capabilities due to substantial screening area
- Massive stockpiling capability through integrated conveyors
- Easy operation through a unique colour-coded control panel with one touch start/stop
- Optimum fuel economy to lower your operating costs
- Wide choice of screen media available
- Hybrid drive option with electric plug in available to run in diesel-hydraulic or diesel-electric mode**
- Fitted with My Fleet telematics with 7 year data subscription as standard





KEY SPECIFICATIONS	QE442	QE342	QE241	QE141
Screen box	18' x 6' / 5.48 m x 1.75 m Double deck	15' 5" x 4' 9" / 4.70 m x 1.45 m Double deck	11' x 4' / 3.35 m x 1.24 m Double deck	14' x 7' / 4.20 m x 2.20 m Vibrating grid
Engine	CAT C4.4 Stage 5 / T4F 110 kW / 147 hp CAT C4.4 Stage 3A Constant Speed 98 kW / 132 hp	CAT C4.4 Stage 5 / T4F 98 kW / 132 hp CAT C4.4 Stage 3A Constant Speed 98 kW / 132 hp CAT NR4 (China) 110 kW / 147 hp JCB Stage 5 97 kW 130 hp JCB T4F 93 kW / 125 hp JCB 3A ROW 97 kW / 130 hp	CAT C2.8 Stage 5 / T4F 55 kW / 74 hp CAT C2.8 Stage 3A LRC*** 55 kW / 74 hp	CAT C2.8 Stage 5 / T4F 55 kW / 74 hp CAT C2.8 Stage 3A LRC*** 55 kW / 74 hp
Transport dimensions	16.33 m / 53' 7" (l) 3.20 m / 10' 6" (w) 3.50 m / 11' 6" (h)	14.83 m / 48' 8" (l) 3.00 m / 9' 10" (w) 3.40 m / 11' 2" (h)	9.99 m / 32' 8" (l) 2.50 m / 8' 2" (w) 3.10 m / 10' 2" (h)	8.69 m / 28' 6" (l) 2.70 m / 8' 10" (w) 3.16 m / 10' 4" (h)
Weight	37,220 kg / 82,056 lbs	28,567 kg / 62,979 lbs	18,559 kg / 40,915 lbs	20,325 kg / 44,808 lbs

* Engine option available dependent upon regional legislation

** Available on QE342 and QE442

*** Lesser Regulated Countries

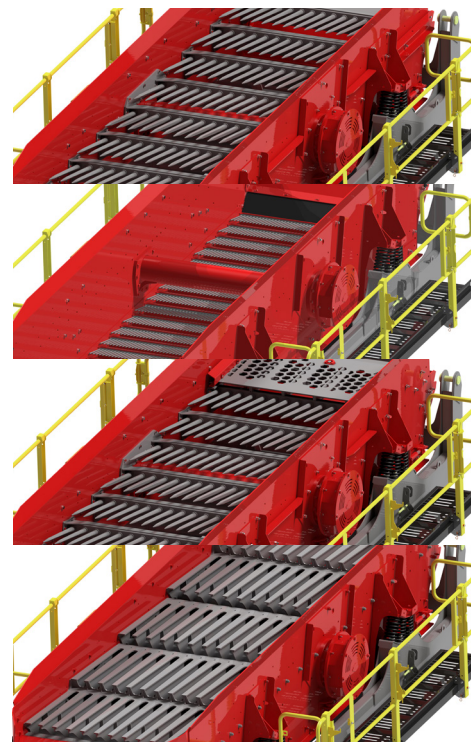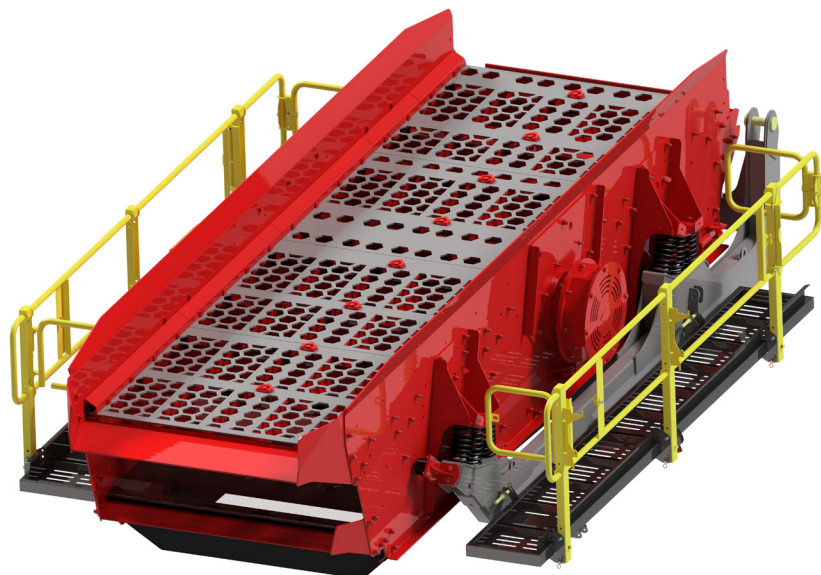

Ability to configure with punch plate, grizzly fingers, bofar bars, mesh or cascade fingers.