



# SCREENPRO \$18 TRACK SCALPER







#### FFATURES & RENFFUTS



The EDGE SCREENPRO **\$**18 heavy duty scalping screen combines high production rates with precision screening. Incorporating a highly aggressive 18'X6' (5.4X1.75m) two deck screen with interchangeable flip flow and conventional scalper screens, the EDGE **\$**18 is a highly flexible screening solution that can handle the most difficult and demanding of applications including; aggregate, construction waste, sand and gravels, soils and organic materials.

With numerous screen media options and configurations available, the SCREENPRO **\$**18 can be utilised as a stand alone unit or if needed, placed before or after a primary crusher.

Impressive design features include, a low level feed hopper, 2 or 3 way split configuration, hydraulic folding discharge conveyors to facilitate the quick transition from operation to transport and a fully integrated power unit with large service access. A user-friendly control system with sequential start/ stop functionality provides exceptional operational performance and unit safety.







#### **KEY HIGHLIGHTS**

- Robust 18'X6' (5.4X1.75m) 2 deck screen box with interchangeable scalping and FreeFlow screen boxes.
- Intelligent modular top deck system allowing numerous media types to be installed side by side.
- High capacity feeder with intelligent load management regulates the flow of material to the screen box.
- User friendly control system with a one-touch sequential start / stop facility.
- Compatible for 2-way or 3-way split configurations.
- Flexible screen angle adjustment to suit various applications.
- Reversible side conveyors allow operators to easily switch discharge positions.
- Offering the widest conveyor belts in its class, the \$18
  provides optimal material flow and high production capacity.

#### **DESIGN FEATURES**





1050mm (42") mid-size conveyor provides a maximum discharge height of up



#### **MATERIAL FLOW**

Designed to allow for a consistent material flow, the SCREENPRO S18 offers enhanced energy efficiency, reduced wear, high throughput and optimised material separation.

The EDGE S18 offers the largest hopper capacity in its class, encompassing a 1400mm (55") wide, variable speed feeder with forward and reverse functionality. A large feed opening ensures optimum flow of material to the scalping screen whilst EDGE's intelligent load management system regulates material feed resulting in superior uptime by eliminating material overload and


ensures optimum screening production at any given time. This is crucial for applications where continuous operation is essential, as interruptions can result in production delays and increased costs.

Discharge belts with widths of up to 1600mm (63") and variable belt speeds aid in the smooth flow of material reducing the risk of material surges, bottlenecks or unnecessary downtime. With hydraulic variable working discharge heights the SCREENPRO S18 can be utilised as a stand-alone unit or if needed, placed before or after a primary crusher.



### THE RIGHT SCREEN FOR

#### **EVERY APPLICATION**

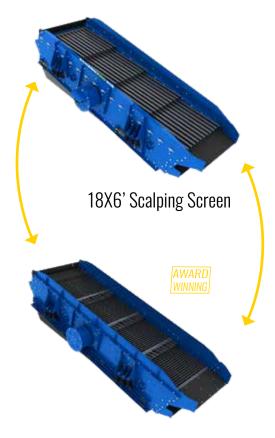

18X6' FreeFlow Screen

Transform even the toughest feed material into profit with the EDGE SCREENPRO S18 heavy duty, tracked scalping screen. Thanks to the dynamic design the EDGE SCREENPRO S18 features interchangeable screens with operators having the ability to interchange between EDGE Innovate's award winning flip flow and conventional scalper screens, providing unprecedented flexibility.

This flexibility combined with numerous screen media options and configurations allows the EDGE SCREENPRO S18 to process a wide range of materials and to tackle screening applications that other conventional screens cannot, such as incinerator slag or wet, damp and sticky material.

#### **ORGANICS AUGER**



Further enhancing application versatility is EDGE Innovate's Organic Auger. This tried and tested option allows the S18 to easily handle troublesome materials that other units struggle with.



#### TECHNICAL SPECIFICATIONS

TRANSPORT DIMENSIONS

16850mm (55' 4") Length: Width: 3000mm (9' 11")

Height: 3500mm (11'5") Shipping Method: RoRo

\*Gross Weight: 43,000KG (48.1UST)

**FEED HOPPER DATA** 

 $12.5m^3$  ( $16.3yd^3$ ) with extensions Hopper Capacity: Minimum Feed In Height: 3100mm (10'3")

**Hopper Extensions: Hydraulic Folding** Feed Conveyor Belt Width: 1400mm (55")

**SCREEN BOX DATA** 

Screen Size: 5.4X1.75m (18'X6')

Screen Box Type: Scalping Screen / FreeFlow Screen Top Deck: 4 off modular cassettes, side

tension / bolted

**Bottom Deck:** 3 off Fixed End Tension Screen Media

Screen Angle: 12° - 18° **OVERSIZE CONVEYOR DATA** 

1600mm (62") Belt Width: Belt Speed: Variable

Max. Discharge Height: 4200mm (13' 10") @ 25°

**MID-SIZE CONVEYOR DATA** 

1050mm (42") Belt Width: Belt Speed: Variable

Max. Discharge Height: 3600mm (11'11") @ 26°

**FINES CONVEYOR DATA** 

1050mm (42") Belt Width: Belt Speed: Variable

Max. Discharge Height: 4100mm (13' 6") @ 28°

**POWERUNIT DATA** 

Tier 4 Final / STAGE V: CAT C4.4 110Kw (148HP) Fuel Tank Capacity: 450 Litres (119USG)

**AVAILABLE OPTIONS** 

LRC Diesel / Hydraulic

Electric Hybrid

STAGE V Diesel / Hydraulic

**Dual Power** 

Scalper Screenbox FreeFlow Screenbox

Various Screen media options

Apron Feeder

Belt Feeder

**Organics Turning Auger** 


**Telematics Overband Magnet**  **Dust Suppression** Chassis Riser

**Emergency Pull Cords** 

<sup>\*</sup>Gross weight depending on options selected.


#### **SCREENPRO S18 OPERATIONAL DIMENSIONS**



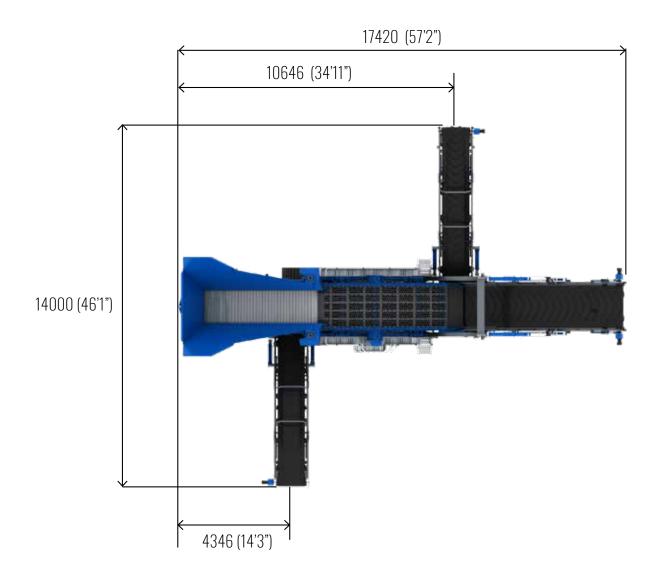

#### **OPTIONS**


## SCREEN BO) Options



**Scalping Screen** - perfect screening solution for large quarrying, mining or recycling applications.



**FreeFlow Screen** - robust Scalping top deck, fine screening of difficult material via flip flow bottom deck.



Apron Feeder - for heavier, coarse feed material.



Hydraulic Chassis Jack Legs - supports the feeding of heavier, coarse feeds.



Organics Turner - perfect for the turning, blending and processing of organic materials.



Magnetic Head Drum / Overband Magnets - enables ferrous metal recovery.



Hydraulic Adjustable Screen Blanket - enhance screening efficiency and performance.



Hydraulic Hopper Extensions - increased hopper capacity and loading target area.



Dust Suppression - dramatically reduce dust development.



Telematics - enhance efficiency, safety, and maintenance with real-time data.

## ADDITIONA Options

OWER SOURCE Onfigurations

T4F / STAGE V- CAT 4.4 110Kw (148HP) (LRC option also available)




Dual Power - provides the ultimate flexibility of running off either direct electric or diesel engine powersources.



Electric Hybrid - All the advantages of a diesel driven unit in an electric hybrid format.



#### **Bottom Deck Media Options**

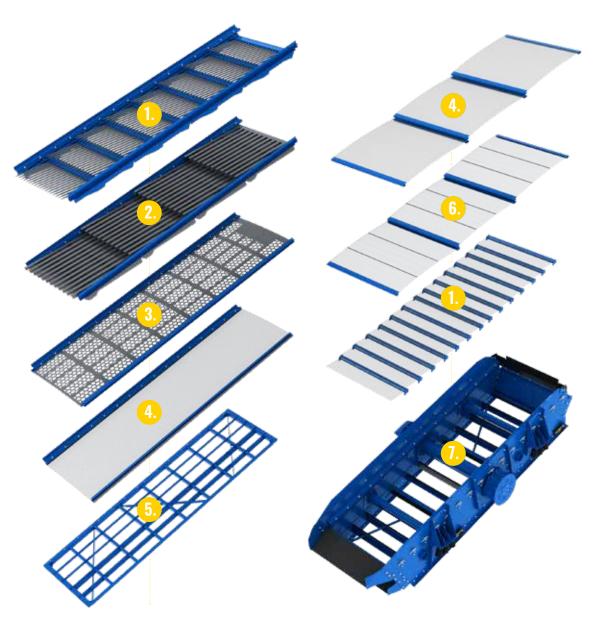

- 1. FINGER SCREEN
  2. BOFOR / GRIZZLY DECK
- 3. PUNCH PLATE
- 4. WIRE MESH
- 5. SCREEN FRAME
- 6. SPEED HARP

7. DOUBLE DECK SCREEN

Different materials and applications require different types of screen media. EDGE Innovate's SCREENPRO S18 offers a range of screen media options for the upper and lower decks, allowing operators to customise their screen to meet their specific needs. Versatility is crucial when dealing with diverse materials like aggregate, gravel, construction waste and more.

Each application has unique characteristics that influence the choice of screen media. Selecting the correct screen media type and combination is critical to ensure optimum screening performance and production capacity.





#### **GO ELECTRIC!**

Enjoy significantly reduced operating costs, reduced servicing and time taken to refuel. Perfect for markets where environmental, legislative or noise constraints are enforced.





## ELECTRIC DRIVE WITH MOBILITY

All the advantages of a diesel driven S18 screener in an electric hybrid format.



## REDUCED OPERATING COSTS

Electric-powered equipment can significantly reduce operating costs.



#### **POWER**

The S18E offers the same production capacity and screening performance of a diesel / hydraulic driven unit.



#### INCREASEI UPTIME

With reduced servicing and time required for refuelling, electric powered units provide unbeatable dependability and uptime.



Features a quick plug and go set up functionality for safe and simple

operation.



#### FLEXIBLI SET UP

All set up functions available in both electric or diesel / hydraulic mode.

## PRODUCT AND TECHNICAL SUPPORT

#### TRIED, TESTED & TRUSTED THROUGHOUT THE GLOBE

With our ethos of "Innovation at Work" EDGE not only persist in pushing the boundaries of design and manufacturing to produce hard working, quality machinery, we also bring that same ethos to our aftersales service in order to bring real benefits to customers right across the world.

At EDGE we like to see the sales transaction as the start of a long-term partnership. Our goal is to offer the best customer support in the market for the lifetime of the unit. EDGE has reinvested and expanded our aftersales department in order to streamline and provide the customer support we believe our customers deserve.



TECHNICAL ASSISTANCE



PARTS AVAILABILITY



DELIVERY



WARRANTY







## **CONTACT US** TODAY.

